



10/12 Ton Gooseneck Commercial Series Pierced Frame

<ul style="list-style-type: none"> • G.V.W.R. - 23,900# • G.A.W.R. (Each Axle) - 10,000# • Coupler - 2-5/16" - Adjustable Gooseneck • Safety Chain - 3/8" Grade 43 w/ Hooks • Jack - 10K Drop Leg • Frame - 12" I-Beam • Crossmembers - 4" Channel on 16" centers • Side rails - 8" Channel with (10) D-Rings • E-Z Lift Ramps 	<ul style="list-style-type: none"> • Axles - (2) Dexter 10,000# Dual Wheel Electric Brake Axles • Suspension - Multi-Leaf Slipper Spring • Tires - ST235/80R16 Load Range E • Wheel - 16" Dual 8-Bolt Grey Spoke • Deck - 2" Pressure Treated Pine • Lights - L.E.D. Stop, Tail, Turn, & Clearance • Elec. Plug - 7-Way RV Style • Paint - High Solids Acrylic Enamel
---	---


* 12T G.V.W.R. - 25,900#

Standard Features Optional Features

<ul style="list-style-type: none"> • 16" Dual Wheels • Crossmembers on 16" Centers • Sealed Modular Wiring Harness • Electric Breakaway • Oil Bath Axles • 5' Dovetail • 5' Spring Loaded Ramps • Locking Toolbox on Neck 	<ul style="list-style-type: none"> • Box End Tail • 12 Ton/HDSS Upgrade • Electric Over Hydraulic • Wood Covered Ramps • Headache Rack • Electric Over Hydraulic Disc Brakes • 2" Oak Floor
---	--

Dimensions

Weight / Length	A	B	C	D	E	Dove
8,000Lbs / 25'	297"	190"	91"	34"	102"	60"
8,200Lbs / 29'	345"	214"	91"	34"	102"	60"
8,400Lbs / 31'	372"	226"	91"	34"	102"	60"
8,600Lbs / 33'	393"	250"	91"	34"	102"	60"
8,800Lbs / 35'	420"	262"	91"	34"	102"	60"
9,000Lbs / 38'	456"	274"	91"	34"	102"	60"
9,200Lbs / 40'	468"	286"	91"	34"	102"	60"

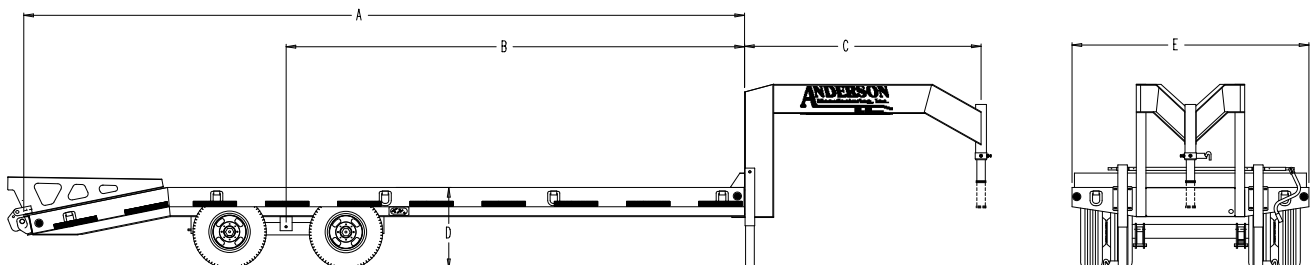

•Specs & Prices Subject to Change Without Notice•