



10/12 Ton Tagalong Commercial Series

Pierced Frame

• G.V.W.R. - 23,900#	• Axles - (2) Dexter 10,000# Dual Wheel Electric Brake Axles
• G.A.W.R. (Each Axle) -10,000#	• Suspension - Multi-Leaf Slipper Spring
• Coupler - 3-Position Adjustable Pintle	• Tires - ST235/80R16 Load Range E
• Safety Chain - 3/8" Grade 43 w/ Hooks	• Wheel - 16" Dual 8-Bolt Grey Spoke
• Jack - 10K Drop Leg	• Deck - 2" Pressure Treated Pine
• Frame -12" I-Beam	• Lights - L.E.D. Stop, Tail, Turn, & Clearance
• Crossmembers - 4" Channel on 16" Center	• Elec. Plug - 7-Way RV Style
• Side rails - 8" Channel w/ (10) D-Rings	• Paint - High Solids Acrylic Enamel
• E-Z Lift Ramps	



* 12T G.V.W.R. - 25,900#

Standard Features Optional Features

• 16" Dual Wheels	• Dual Jacks
• Crossmembers on 16" Centers	• Boxend Tail
• Sealed Modular Wiring Harness	• Air Brake Upgrade
• Electric Breakaway	• 12 Ton/HDSS Upgrade
• Oil Bath Axle	• Electric Over Hydraulic
• 5' Wood Covered Dovetail	• Electric Over Hydraulic
• 5' Spring Loaded Ramps	• Disc Brakes
• Lockable Tool Box	• Paver Option
• Rubber Mounted Lights	• Hydraulic Ramps

Dimensions

Weight / Length	A	B	C	D	E	Dove
6,900Lbs / 25'	300"	190.5"	68.5"	34"	102"	60"
7,100Lbs / 29'	348"	214.5"	68.5"	34"	102"	60"
7,300Lbs / 33'	396"	238.5"	68.5"	34"	102"	60"

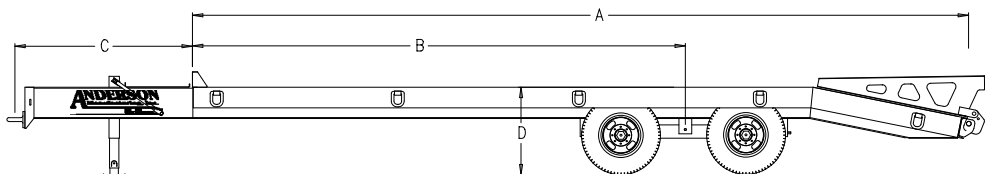

•Specs & Prices Subject to Change Without Notice•