



10/12 Ton Tilt Commercial Series

<ul style="list-style-type: none"> • G.V.W.R. - 23,900# • G.A.W.R. (Each Axle) - 10,000# • Coupler - 3-Position Adjustable Pintle • Safety Chain - 3/8" Grade 43 w/ Hooks • Jack - 10K Drop Leg • Frame - 12" I-Beam • Crossmembers - 4" Channel on 16" Center • Side Rails - 8" Channel w/ D-Rings • Approach Plate for Easy Loading 	<ul style="list-style-type: none"> • Axles - (2) Dexter 10,000# Dual Wheel Electric Brake Axles • Suspension - Multi-Leaf Slipper Spring • Tires - ST235/80R16 Load Range E • Wheel - 16" Dual 8-Bolt Grey Spoke • Deck - 2" Pressure Treated Pine • Lights - L.E.D. Stop, Tail, Turn, & Clearance • Elec. Plug - 7-Way RV Style • Paint - High Solids Acrylic Enamel
--	---


* 12T G.V.W.R. - 25,900#

Standard Features Optional Features

<ul style="list-style-type: none"> • 16" Dual Wheels • Crossmembers on 16" Centers • Modular Wiring Harness • Electric Breakaway • Oil Bath Axles • Rubber Mounted Lights • Lockable Toolbox in Tongue 	<ul style="list-style-type: none"> • 2" Oak Floor • Steel Deck (11 Ga. Dia) • 12 Ton/HDSS Upgrade • Electric Over Hydraulic • Electric Over Hydraulic Disc Brakes • Gooseneck
---	---

Dimensions

Weight / Length	A	B	C	D	E	Dove
7,000Lbs / 25'	296"	150.5"	68"	34"	102"	60"
7,250Lbs / 29'	340"	162.5"	68"	34"	102"	60"

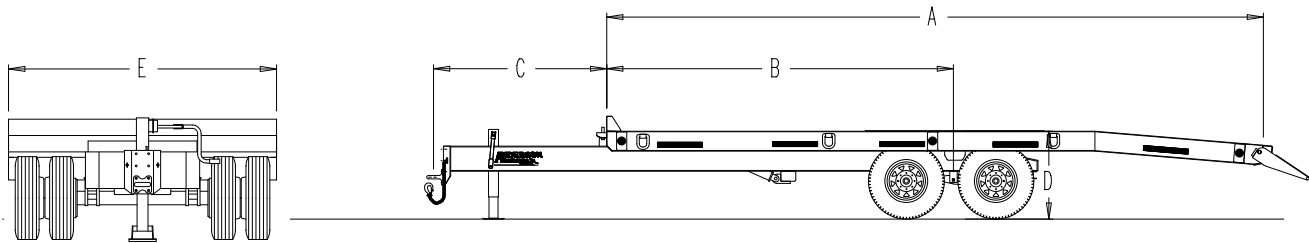

•Specs & Prices Subject to Change Without Notice•