



## 15/20 Ton Tilt Commercial Series

• G.V.W.R. - 45,000#	• Axles - (2) 22,500# Dual Wheel Air Brake Axles w/ Spring Brake
• G.A.W.R. (Each Axle) - 22,500#	• Suspension - Heavy Duty Hutch 9700
• Coupler - 3-Position Adjustable Pintle	• Tires - ST215/75R17.5 Load Range H
• Safety Chain - 7/16" Grade 70 w/ Hooks	• Wheel - 6.75 x 17.5" 10-Bolt
• Jack - 25K 2-Speed Landing Gear	• Deck - 2" Oak
• Top Frame (Deck) - Custom Channel	• Lights - L.E.D. Stop, Tail, Turn, & Clearance
• Frame - 14" @ 26# I-Beam	• Elec. Plug - 7-Way Semi Type
• Crossmembers - 4" Channel on 16" Center	• Paint - High Solids Acrylic Enamel
• Side Rails - 8" Channel w/ (10) D-Rings	


\* 15T G.V.W.R. - 32,500#

### Standard Features

• ABS on One Axle
• Modular Wiring Harness
• Internal to Air and Emergency Relay Valve
• Oil Bath Axles
• Locking Tool Box
• Rubber Mounted Lights

### Dimensions

Weight / Length	A	B	C	D	E	Dove
7,500Lbs / 25'	300"	148"	73.5"	36"	102"	60"
7,750Lbs / 29'	348"	172"	73.5"	36"	102"	60"

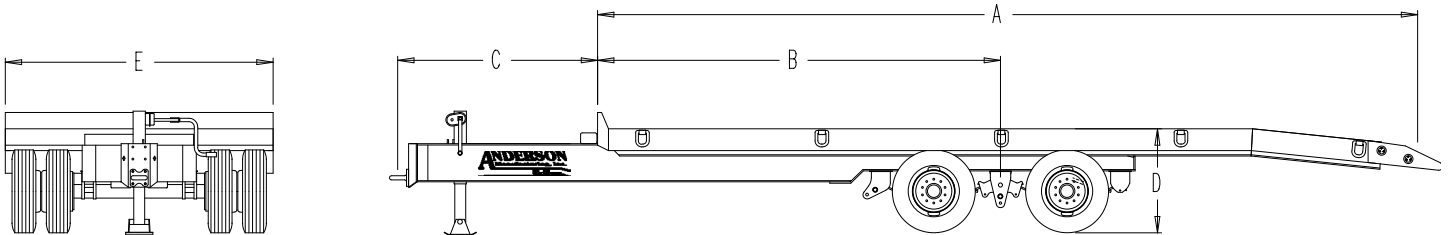

•Specs & Prices Subject to Change Without Notice•