



15 Ton Tagalong Commercial Series

Pierced Frame

• G.V.W.R. - 32,500#	• Axles - (2) Dexter 15,000# Dual Wheel Electric Brake Axles
• G.A.W.R. (Each Axle) - 15,000#	• Suspension - Slipper Spring
• Coupler - 3-Position Adjustable Pintle	• Tires - ST215/75R17.5 Load Range H
• Safety Chain - 7/16" Grade 70 w/ Hooks	• Wheel - 6.75 x 17.5" 8-Bolt
• Jack - 25K 2-Speed Landing Gear	• Deck - 2" Oak
• Frame - 14" @ 26# I-Beam	• Lights - L.E.D. Stop, Tail, Turn, & Clearance
• Crossmembers - 5" Channel on 16" Center	• Elec. Plug - 7-Way Semi Type
• Side rails - 8" Channel w/ (10) D-Rings	• Paint - High Solids Acrylic Enamel
• E-Z Lift Ramps	


Standard Features

Optional Features

• Sealed Modular Wiring Harness	• Dual Jacks
• Oil Bath Axles	• 6' Dovetail
• 5' Dovetail	• Gooseneck Option
• 5' Spring Loaded Ramps	• Paver Option
• Lockable Toolbox	• Hydraulic Ramps
• Rubber Mounted Lights	• Hutch 9700/HDSS Upgrade

Dimensions

Weight / Length	A	B	C	D	E	Dove
9,200Lbs / 25'	300"	189.5"	69"	34"	102"	60"
9,400Lbs / 29'	348"	213.5"	69"	34"	102"	60"
9,600Lbs / 33'	396"	237.5"	69"	34"	102"	60"

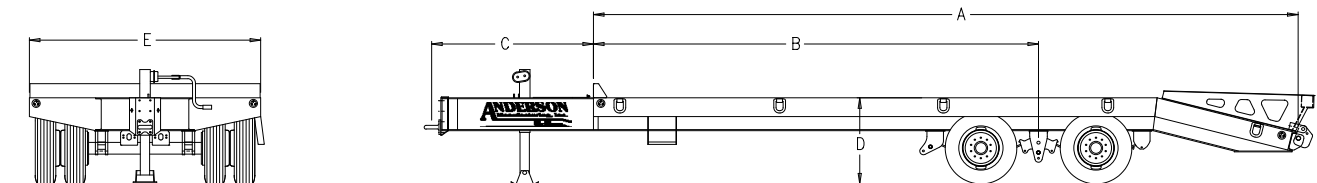

•Specs & Prices Subject to Change Without Notice•