



7 Ton Gooseneck Workhorse Series Pierced Frame

| | |
|---|---|
| • G.V.W.R. - 14,000# | • Axles - (2) Dexter 7,000# Single Wheel Electric Brake Axles |
| • G.A.W.R. (Each Axle) - 7,000# | • Suspension - Multi-Leaf Spring w/ Equalizer |
| • Coupler - 2-5/16" - Adjustable Gooseneck | • Tires - ST235/80R16 Load Range E |
| • Safety Chain - 3/8" Grade 43 w/ Hooks | • Wheel - 16" 8-Bolt White Spoke |
| • Jacks - Dual 10,000# Drop Leg | • Deck - 2" Pressure Treated Pine |
| • Frame - 12" I-Beam | • Lights - L.E.D. Stop, Tail, Turn, & Clearance |
| • Crossmembers - 3" Structural Channel on 16" Centers w/ Pierced Frame Construction | • Elec. Plug - 7-Way RV Style |
| • Side Rails - 6" Channel | • Paint - High Solids Acrylic Enamel |


Standard Features

Optional Features

| | |
|---------------------------------|---------------------------|
| • 16" White Spoke Rim | • Deck Over Neck |
| • Sealed Modular Wiring Harness | • Headache Rack |
| • E-Z Lube Axles | • Center Pop-Up Dovetail |
| • Electric Breakaway | • Center Mounted Ramp |
| • 5' Self-Cleaning Dovetail | • 36" X-Ramps |
| • Deck Level Ramps | • Electric Over Hydraulic |
| • Spare Tire Mount | • Box End Tail |
| • Locking Toolbox in Neck | • Hydraulic Disc Brakes |

Dimensions

| Weight / Length | A | B | C | D | E | Dove |
|-----------------|------|------|-----|-----|------|------|
| 5,750Lbs / 25' | 300" | 183" | 98" | 35" | 102" | 60" |
| 5,900Lbs / 29' | 348" | 207" | 98" | 35" | 102" | 60" |

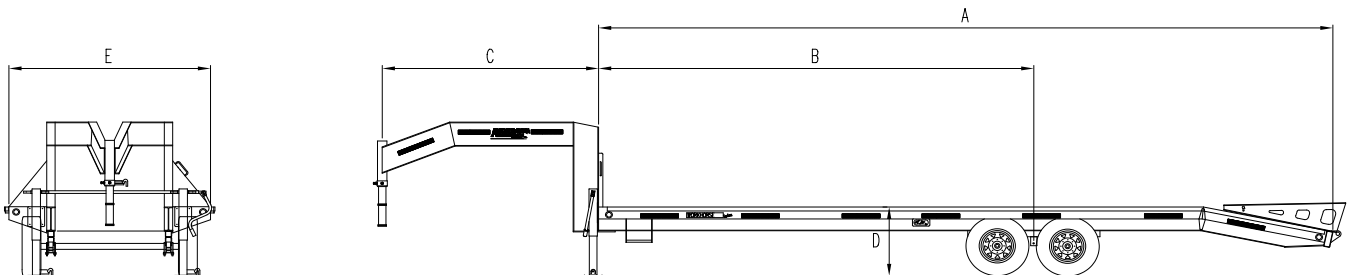

•Specs & Prices Subject to Change Without Notice•