



7 Ton Tagalong Workhorse Series Pierced Frame

| | |
|---|---|
| • G.V.W.R. - 14,000# | • Axles - (2) Dexter 7,000# Single Wheel Electric Brake Sxles |
| • G.A.W.R. (Each Axle) - 7,000# | • Suspension - Multi-Leaf Spring w/Equalizer |
| • Coupler - 3-Position Adjustable Pintle | • Tires - ST235/80R16 Load Range E |
| • Safety Chain - 3/8" Grade 43 w/ Hooks | • Wheel - 16" 8-Bolt White Spoke |
| • Jacks - Dual 10K Drop Leg | • Deck - 2" Pressure Treated Pine |
| • Frame - 12" I-Beam | • Lights - L.E.D. Stop, Tail, Turn, & Clearance |
| • Crossmembers - 3" Structural Channel on 16" Centers w/ Pierced Frame Construction | • Elec. Plug - 7-Way RV Style |
| • Side rails - 6" Channel | • Paint - High Solids Acrylic Enamel |


Standard Features

Optional Features

| | |
|------------------------------|---|
| • E-Z lube Axles | • Center Pop-Up Dovetail w/ Gas Spring Assist |
| • Electric Breakaway | • Double 2-Speed Jacks |
| • 5' Self-Cleaning Dovetail | • Electric Over Hydraulic |
| • Deck Level Ramps | • Boxend Tail |
| • Spare Tire Mount | • Anti-Twist Pipes |
| • Lockable Toolbox in Tongue | • 36" X-Ramps |
| • Stake Pockets & Rub Rails | |

Dimensions

| Weight / Length | A | B | C | D | E | Dove |
|-----------------|------|---------|-----|-----|------|------|
| 5,550Lbs / 25' | 300" | 178.75" | 68" | 34" | 102" | 60" |
| 5,700Lbs / 29' | 348" | 202.75" | 68" | 34" | 102" | 60" |

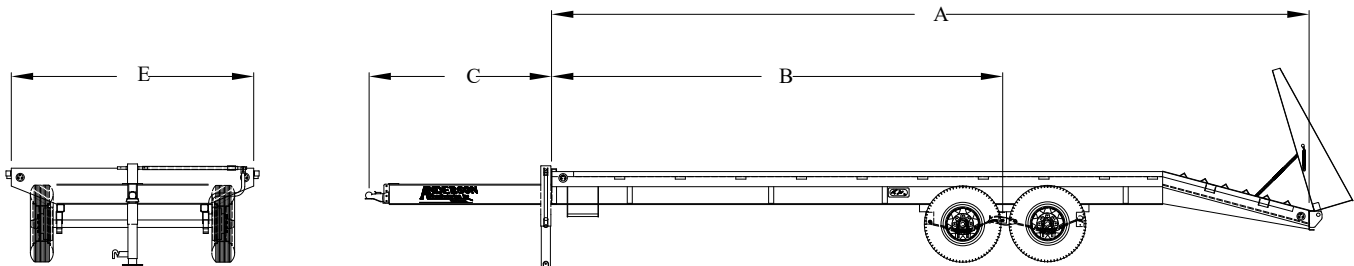

• Specs & Prices Subject to Change Without Notice •