



## 5 Ton Tagalong Series

• G.V.W.R. - 9,950#	• Axles - (2) 5,000# Cambered Brake Axles
• G.A.W.R. (Each Axle) - 5,200#	• Suspension - Multi-Leaf Spring w/ Equalizer
• Coupler - 2-5/16" - Adjustable Type	• Tires - 225/75R15 Load Range D
• Safety chain - 8/0 Grade 30 w/ Hooks	• Wheel - 15" 6-Bolt White Spoke
• Jack - 7K Top Wind	• Deck - 2" Pressure Treated Pine
• Frame - 8" I-Beam	• Lights - L.E.D. Stop, Tail, Turn, & Clearance
• Crossmembers - 2x3x3/16" Angle	• Elec. Plug - 7-Way RV Style
• Ramps - 6' Slide Out w/ Lock	• Paint - Super Durable Powdercoat
• Crossmembers of 16" Centers	• Sealed Modular Wiring Harness


### Standard Features

### Optional Features

• Adjustable Coupler	• Steel Deck
• Pressure Treated Floor	• 6 Ton Axle Upgrade
• Electric Breakaway	• Tool Tray in Tongue
• E-Z Lube Axles	• Spare Tire Rack
• 6' Slide Out Ramps	• 10K Jack

### Dimensions

Weight / Length	A	B	C	D	E
2,500Lbs / 16'	192"	113.25"	51.25"	30.5"	102"
2,600Lbs / 18'	216"	125.25"	51.25"	30.5"	102"
2,700Lbs / 20'	240"	137.25"	51.25"	30.5"	102"

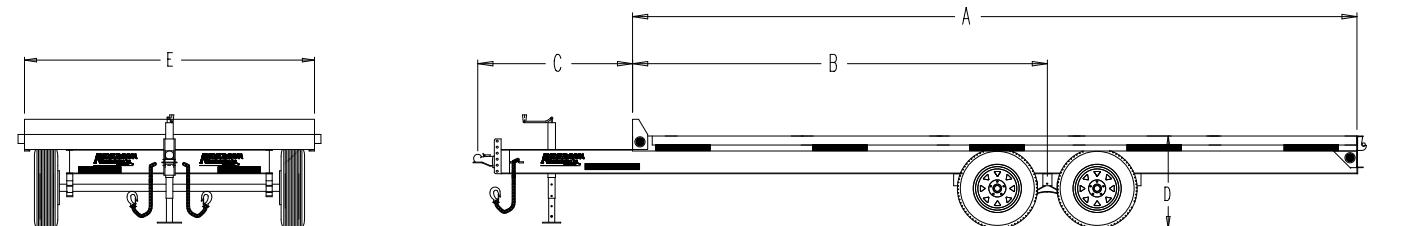

•Specs & Prices Subject to Change Without Notice•